
NOTES:

- 1.0 ELECTRICAL SPECIFICATIONS
- 1.1 FREQUENCY RANGE: DC TO 18.0 GHz
- 1.2 MAXIMUM INPUT POWER:
 - 2 WATTS AVG AT +25°C DERATED LINEARLY TO 0.5 WATTS AT +125°C.
- 1.3 OPERATING TEMPERATURE RANGE: -55℃ TO +125°C
- 1.4 IMPEDANCE: 50 OHMS
- 1.5 VSWR: 1.25:1 MAX.
- 2.0 MARKING
- 2.1 MARK UNIT AS SHOWN: (REF: INK-02611-27-19)
- 3.0 DIMENSIONS IN PARENTHESIS ARE MILLIMETERS.

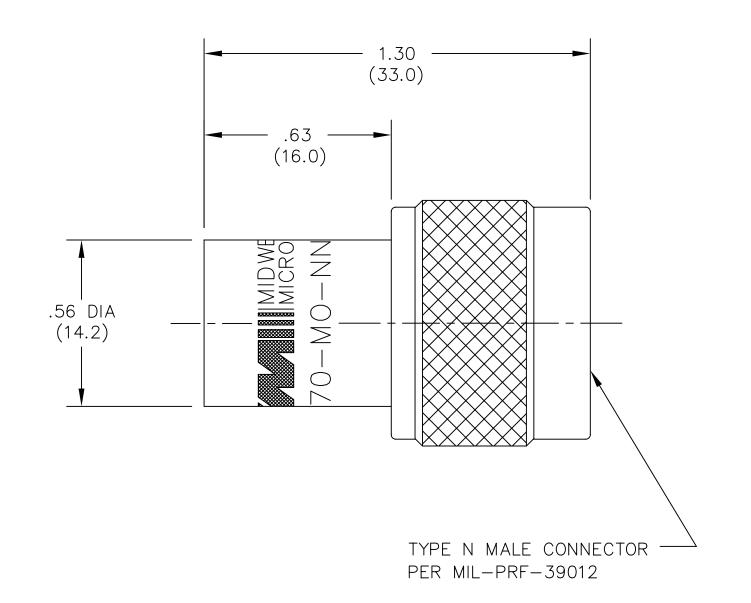

FLATNESS: T.I.R.

CONCENTRICITY: T.I.R. -

ANGLES AND PERPENDICULARITY: ±1'

DATE	9/22/92	68/02/9	2/23/90	16/61/4	16/01/2	8/21/92	10/27/05
DESCRIPTION	RELEASED	ECR 6545	ECR 7129	ECR 10356	ECN 10759	REDRAW ON CAD	ADDED TITLEBLOCK
REV.	1	٧	В	Э	Q	Ε	lЭ

DWG. WAS: 02712-01-00

UNLESS OTHERWISE NOTED DIMENSIONS	34078 <i>MIDW</i>	YEST MICROWAVE			
ARE IN INCHES AND TOLERANCES ARE:	NOTICE: The information	TERMINATION			
3 PLACE DECIMALS ±.005	contained in this drawing is proprietary				
2 PLACE DECIMALS ±.02	and must not be used without the permission				
FRACTIONS ±1/64	of Midwest Microwave				
PARALLELITY: T.I.R	DRAWN/DATE FNG /DATE	DRAWING AUTOPER			

M.HOLLMAN 8/21/92 G.KOZAK 9/21/92 CHECKED/DATE A.BEATTY 9/10/92

DRAWING NUMBER TRM-2070-MO-NNN-07

3=1 SCALE:

SHEET

TRM-2070-MO-NNN-07