

1	HIS COPY IS PROVIDED ON A	A RESTRICTED BASIS AND IS NOT TO BE U	SED IN ANY WAY DETRIMENTAL TO THE INTERESTS OF PANDUIT CORP.			
	Material	High Conductivity Seamless Copper Tube				
	Plating	Electro-Tin				
	Wire Size	8 AWG	ر 3737			
	Wire Type	Stranded Copper; Class B: Compact, Compressed or Concentric, Class C: Concentric				
	Wire Strip Length	3/4 in.	PANDUIT SIR CU S			
	Stud Size	1/4 in.	AN A			
	UL Listed Wire Connector	Yes, for applications up to 35kv. Consult cable manufacturer for voltage stress relief instructions with applications greater than 2000 volts.	.25±.04 .63±.02 .27±.02 (2) F			
	UL Temperature Rating	90° C	2.10±.06			
	C.S.A Certified Wire Connector	Yes				
	Panduit Color Code on Barrel	RED				
	Panduit Die Index No. on Barrel	P21	 			
	Alternate Industry Die Index No. () on Barrel	N/A	Wire inspection window			





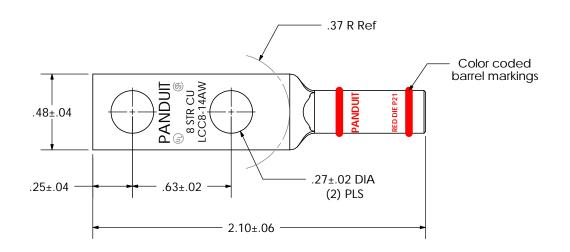

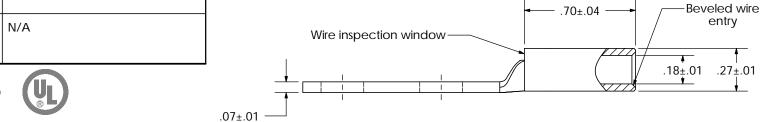

LISTED Wire Connector

							CORP. TINLEY PARK, ILLINOIS
							LCC8-14AW-L
01	9/05	DRL	DRL	REMOVED NAVY NUMBER	PC00116	Copper Lug - Tv	vo-Hole, Long Barrel with Window
REV	DATE	BY	СНК	DESCRIPTION	ECN	SCALE N/A	DRAWING NO / CAD FILE LCC8-14AW-CUST