

## SEMS SCREW TERMINALS



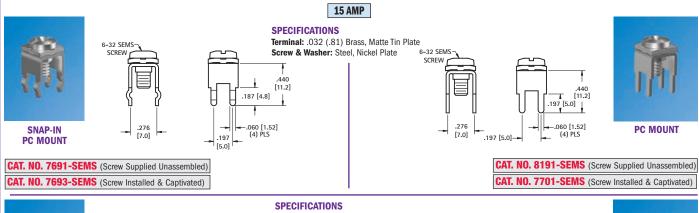

CAT. NO. 7690-SEMS (Screw Supplied Unassembled) CAT. NO. 7692-SEMS (Screw Installed & Captivated)

CAT. NO. 8190-SEMS (Screw Supplied Unassembled) CAT. NO. 7700-SEMS (Screw Installed & Captivated)

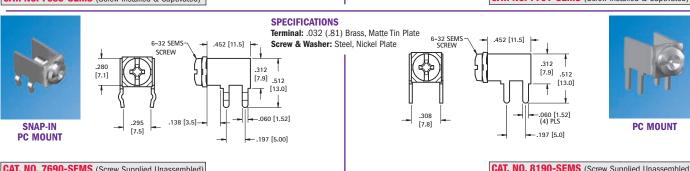


6-32 SEMS SCREW .134 [3.4] .331 [8.4] .059 [1.50] (4) PLS .276 .232



Terminal: .032 (.81) Brass. Matte Tin Plate Screw & Washer: Steel, Nickel Plate

**SPECIFICATIONS** 






CAT. NO. 8198-SEMS (Screw Supplied Unassembled) CAT. NO. 7778-SEMS (Screw Installed & Captivated)









CAT. NO. 8199-SEMS (Screw Installed & Captivated)

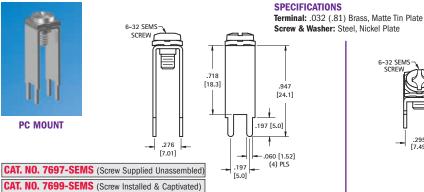









CAT. NO. 8189-SEMS (Screw Supplied Unassembled) CAT. NO. 7702-SEMS (Screw Installed & Captivated)



SEMS Screw Terminals provide quick and secure attachment of wire leads. SEMS screw has captivated, free spining lock washer, eliminated twisting of wire when tightening lead to terminal. Washer will rise with head of screw when unscrewed.





**SPECIFICATIONS** Screw & Washer: Steel. Nickel Plate

CAT. NO. 9920 (SEMS Screw Only)