

Series 537 Insert Plates for Universal PLCC ZIF Test Socket

FEATURES


- Conveniently Hand-insert 7 Separate Insert Plates into 'Live Bug' Universal PLCC ZIF Test Socket (P/N 84-537-21) to hold 7 Differently-sized PLCC Footprints
- · Four Mounting Holes (2 Bifurcated) Mate with Mounting Post in Socket Base for Secure Assembly

GENERAL SPECIFICATIONS

- INSERT: black UL 94V-0 glass-filled Polyphenylene Sulfide (PPS)
- OPERATING TEMPERATURE: -85°F [-65°C] to 500°F [260°C]
- CONTACT BLOCK AND LATCH HINGE: available individually

MOUNTING CONSIDERATIONS

SUGGESTED PCB HOLE SIZE: 0.035 ±0.002 [0.89 ±0.05] dia.

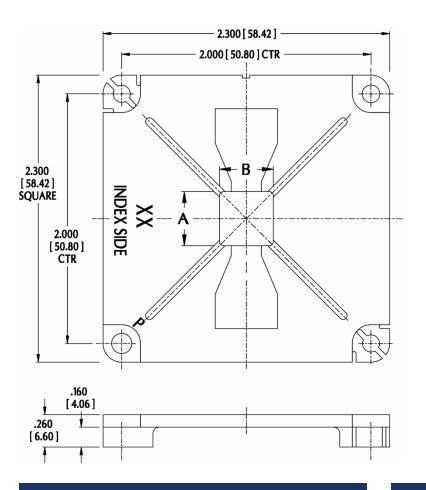



ORDERING INFORMATION

XX-537-20 Series Number of Positions (see Table below)

USE P/N 1110832 WHEN ORDERING ALL SEVEN INSERT **PLATES**

No. Positions	Dim "A"	Dim. "B"
20	0.395 to 0.397 [10.03 to 10.08]	0.395 to 0.397 [10.03 to 10.08]
28	0.495 to 0.497 [12.57 to 12.62]	0.495 to 0.497 [12.57 to 12.62]
32	0.495 to 0.497 [12.57 to 12.62]	0.595 to 0.597 [15.11 to 15.16]
44	0.695 to 0.697 [17.65 to 17.70]	0.695 to 0.697 [17.65 to 17.70]
52	0.795 to 0.797 [20.19 to 20.24]	0.795 to 0.797 [20.19 to 20.24]
68	0.995 to 0.997 [25.27 to 25.32]	0.995 to 0.997 [25.27 to 25.32]
84	1.195 to 1.197 [30.35 to 30.40]	1.195 to 1.197 [30.35 to 30.40]

ALL DIMENSIONS: INCHES [MILLIMETERS] ALL TOLERANCES: ±0.005 [0.13] UNLESS OTHERWISE SPECIFIED FOR TEST SOCKET, SEE DATA SHEET 10010 **CONSULT FACTORY FOR OTHER SIZES AND CONFIGURATIONS**

CUSTOMIZATION: ARIES SPECIALIZES IN CUSTOM DESIGN AND PRODUCTION. SPECIAL MATERIALS, PLATINGS, SIZES, AND CONFIGURATIONS CAN BE FURNISHED, DEPENDING ON QUANTITY.

ARIES RESERVES THE RIGHT TO CHANGE PRODUCT GENERAL SPECIFICATIONS WITHOUT NOTICE

PRINTOUTS OF THIS DOCUMENT MAY BE OUT-OF-DATE AND SHOULD BE CONSIDERED UNCONTROLLED



