THIS IS ISSUED IN STRICT CONFIDENCE THAT IT IS NOT USED AS A BASIS FOR MANUFACTURE OR SALE AND THAT IT IS NOT COPIED. REPRINTED OR DISCLOSED TO A THIRD PARTY EITHER WHOLLY OR IN PART WITHOUT THE PRIOR WRITTEN CONSENT OF CAL TEST ELECTRONICS. INC.


- 1. 4mm SLIM SAFETY ADAPTER. APPLICATION: CONVERTS STANDARD 4mm JACK TO ACCEPT SHEATH BANANA PLUGS. UPGRADES JACK TO IFC SPECIFICATIONS.
- 2. SPECIFICATIONS: INSULATOR: POLYACETAL CONTACT: BRASS, NICKEL PLATED SET SCREW: STEEL

PART NUMBER

CT2575-#

APPLICATION

- 3. RATING: VOLTAGE: 400 V CAT | P2 (IEC 61010-031) CURRENT: 36 A MAX. RESISTANCE: $<5 \text{ m}\Omega$. TEMPERATURE: -20° C TO $+80^{\circ}$ C.
- 4. INSERT ADAPTER INTO SOCKET, TIGHTEN INTERNAL SET SCREW WITH 1.5 mm ALLEN WRENCH, SUPPLIED SPERATELY (CT2919)

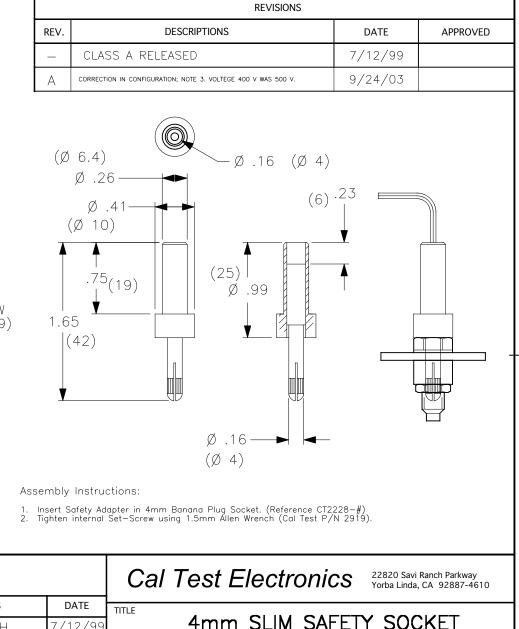

ADAPTER

P257500

SHEET

REV.

А

1 OF 1

DWG. NO.

SCALE

1:1

	4 - YE 5 - GF 6 - BL 9 - WE	LLOW Ass REEN 1. LUE 2.	Assembly Instructions: 1. Insert Safety Adapter in 4mm Banana Plug S 2. Tighten internal Set-Screw using 1.5mm Alle		
THIRD ANGLE PROJECTION	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES	CONTRACT NO.		0.1	
\wedge \neg	TOLERANCES ARE: FRACTIONS DECIMALS			Cai	Test l
- (()) - [- + -	± 1/32 .XX ± .02 .XXX ±.005	APPROVALS	DATE	TITLE	
\downarrow	DO NOT SCALE DRAWING	drawn WDH	7/12/99		4mm
	MATERIAL	CHECKED			
	FINISH	ENGR.		SIZE CAGE C	
NEXT ASSY USED ON		DESIGN ACTIVITY		A 4	3F45

2 - RED

COLOR: 0 – BLACK