

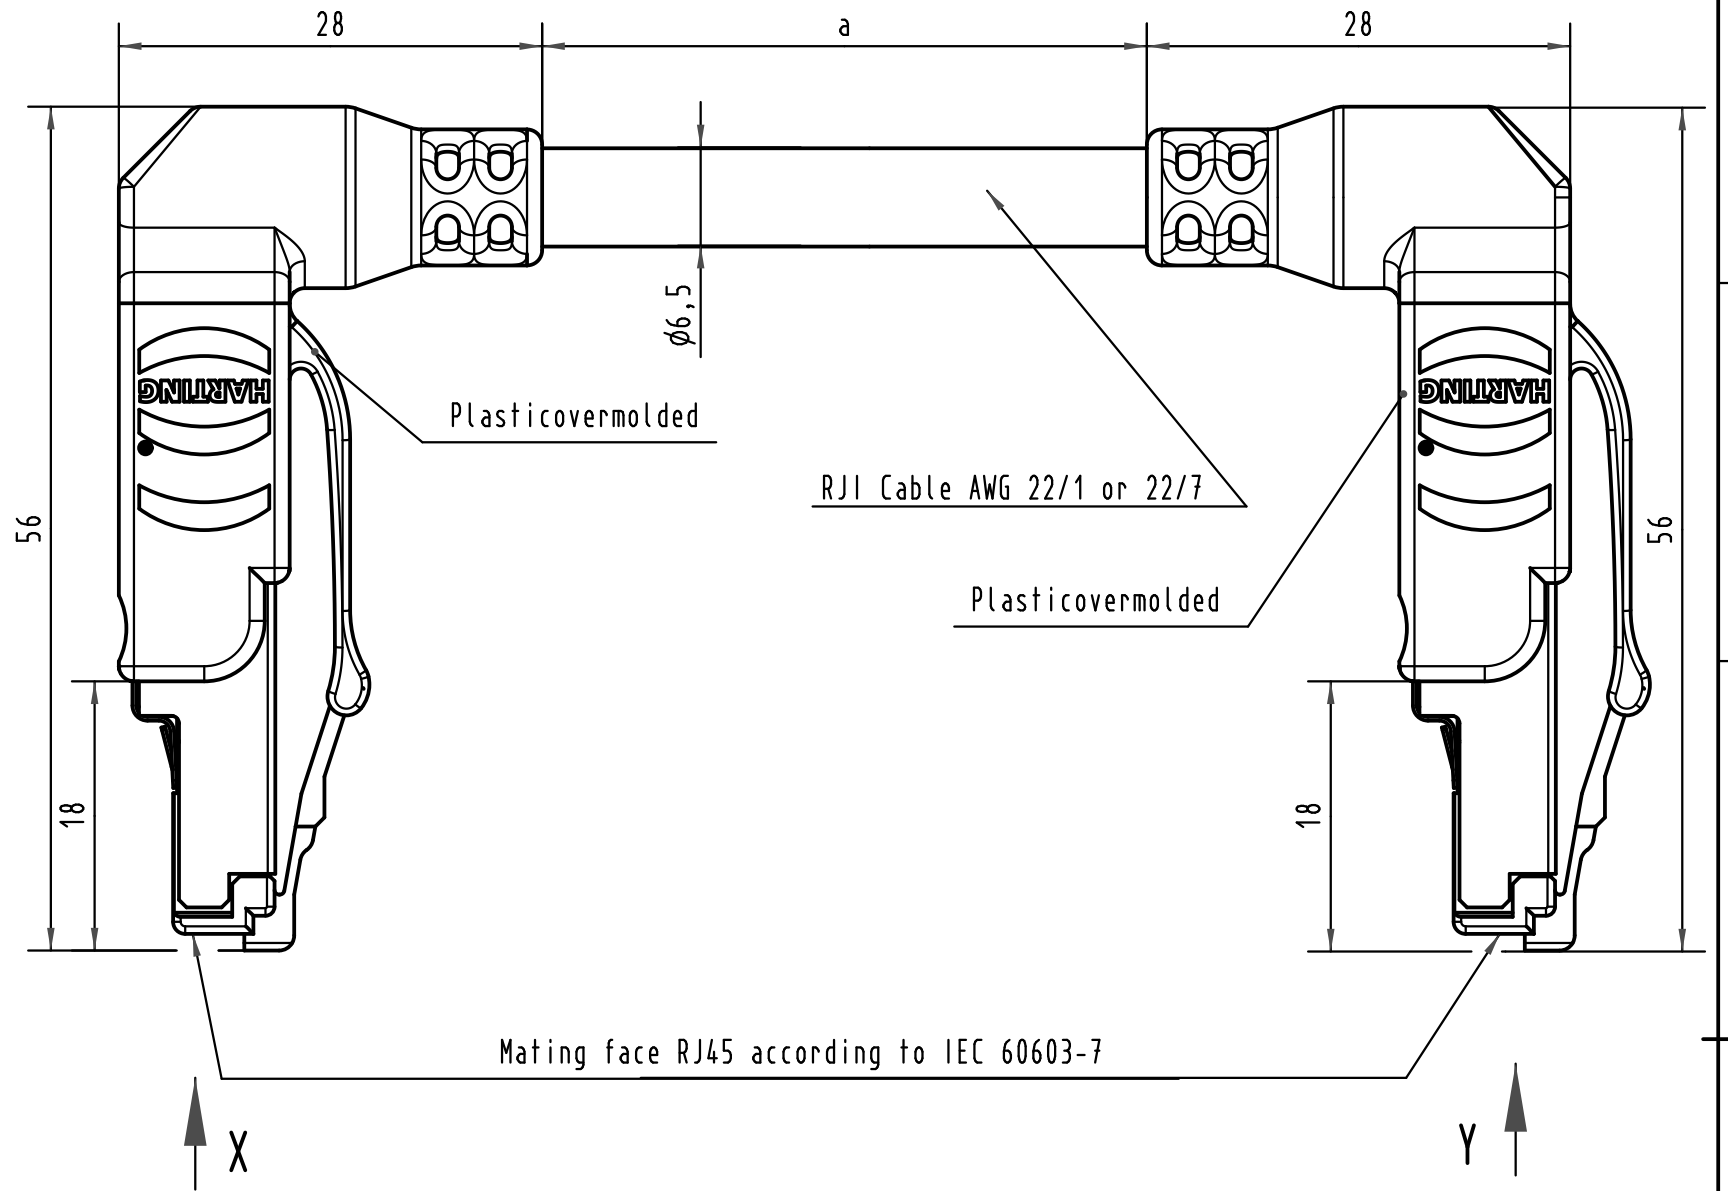


Alle Rechte vorbehalten/ All rights reserved

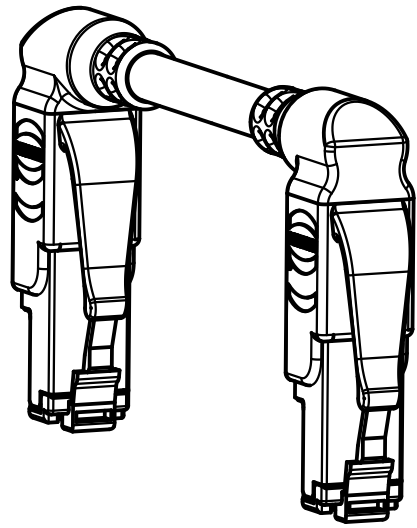

Loading-Plan:

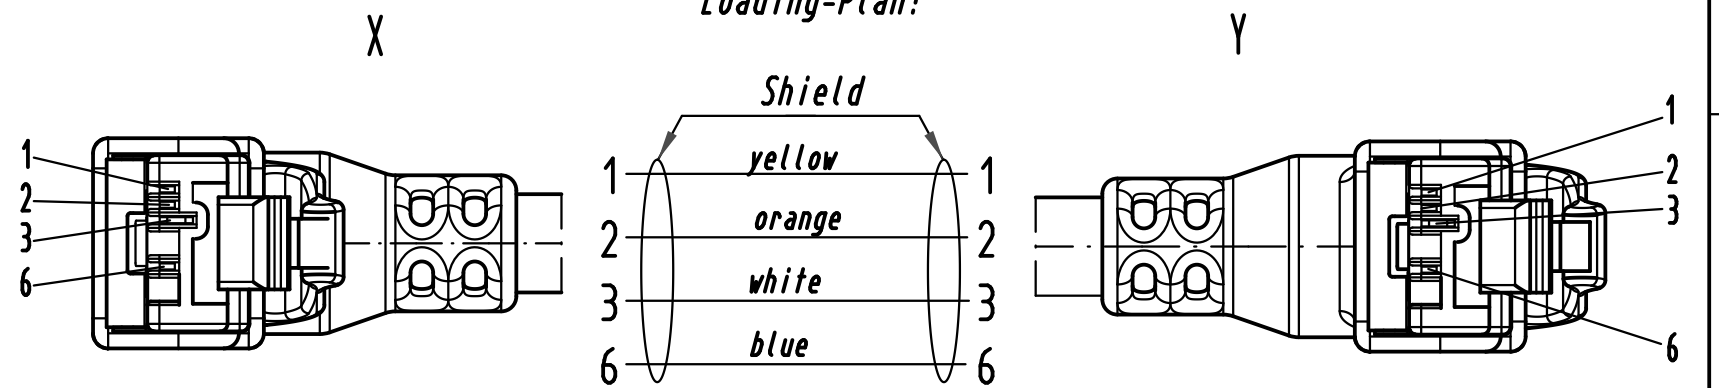


-Transmission properties in accordance with ISO/IEC 11801:2002: Class D.
 -Protection level: IP20
 -Temperature range: -40°C ...+70°C

All Dimensions in mm Original Size DIN A 3			Techn. Character.			Nicht tolerierte Maß/Free size tolerances		
				Dat.	Name	Maßstab/Scale 2:1 (1:1)	RJ45 cord IP20, 90° angled overmoulding 2xRJ45, 90°+270° Position, CAT5	
			Detail.	14.10.05	MR			
			Insp.	14.10.05	RA			
DRS490A	07.04.09	MS	Stand.				TB 09 47 03 04 0xx Sub.	
32762	15.12.05	MS						
32756								
Mod.	Dat.	Name	HARTING Electronics GmbH & Co. KG D-32339 ESPELKAMP					Blatt/ page 1/2

Alle Rechte vorbehalten/ All rights reserved

1				2				3				4				5				6				7				8			
cont-No.	Part-No.			Type of cable	Dim. a			cont-No.	Part-No.			Type of cable	Dim. a																		
A	1	09 47 03 04 001			AWG 22/1 solid	0,5 m			51	09 47 03 04 051			AWG 22/7 trailing	5 m																	
	2	09 47 03 04 002			AWG 22/1 solid	1 m			52	09 47 03 04 052			AWG 22/7 trailing	6 m																	
	3	09 47 03 04 003			AWG 22/1 solid	1,5 m			53	09 47 03 04 053			AWG 22/7 trailing	7 m																	
	4	09 47 03 04 004			AWG 22/1 solid	2 m			54	09 47 03 04 054			AWG 22/7 trailing	8 m																	
	5	09 47 03 04 005			AWG 22/1 solid	3 m			55	09 47 03 04 055			AWG 22/7 trailing	9 m																	
	6	09 47 03 04 006			AWG 22/1 solid	4 m			56	09 47 03 04 056			AWG 22/7 trailing	10 m																	
	7	09 47 03 04 007			AWG 22/1 solid	5 m			57	09 47 03 04 057			AWG 22/7 trailing	15 m																	
	8	09 47 03 04 008			AWG 22/1 solid	6 m			58	09 47 03 04 058			AWG 22/7 trailing	20 m																	
	9	09 47 03 04 009			AWG 22/1 solid	7 m			59	09 47 03 04 059			AWG 22/7 trailing	30 m																	
B	10	09 47 03 04 010			AWG 22/1 solid	8 m			60	09 47 03 04 060			AWG 22/7 trailing	40 m																	
	11	09 47 03 04 011			AWG 22/1 solid	9 m			61	09 47 03 04 061			AWG 22/7 trailing	50 m																	
	12	09 47 03 04 012			AWG 22/1 solid	10 m			62	09 47 03 04 062			AWG 22/7 trailing	60 m																	
	13	09 47 03 04 013			AWG 22/1 solid	15 m			63	09 47 03 04 063			AWG 22/7 trailing	70 m																	
	14	09 47 03 04 014			AWG 22/1 solid	20 m			64	09 47 03 04 064			AWG 22/7 trailing	80 m																	
	15	09 47 03 04 015			AWG 22/1 solid	30 m			65	09 47 03 04 065			AWG 22/7 trailing	90 m																	
	16	09 47 03 04 016			AWG 22/1 solid	40 m			66	09 47 03 04 066			AWG 22/7 trailing	100 m																	
	17	09 47 03 04 017			AWG 22/1 solid	50 m			67	09 47 03 04 067			AWG 22/7 "outdoor"	0,5 m																	
	18	09 47 03 04 018			AWG 22/1 solid	60 m			68	09 47 03 04 068			AWG 22/7 "outdoor"	1 m																	
	19	09 47 03 04 019			AWG 22/1 solid	70 m			69	09 47 03 04 069			AWG 22/7 "outdoor"	1,5 m																	
C	20	09 47 03 04 020			AWG 22/1 solid	80 m			70	09 47 03 04 070			AWG 22/7 "outdoor"	2 m																	
	21	09 47 03 04 021			AWG 22/1 solid	90 m			71	09 47 03 04 071			AWG 22/7 "outdoor"	3 m																	
	22	09 47 03 04 022			AWG 22/1 solid	100 m			72	09 47 03 04 072			AWG 22/7 "outdoor"	4 m																	
	23	09 47 03 04 023			AWG 22/7 stranded	0,5 m			73	09 47 03 04 073			AWG 22/7 "outdoor"	5 m																	
	24	09 47 03 04 024			AWG 22/7 stranded	1 m			74	09 47 03 04 074			AWG 22/7 "outdoor"	6 m																	
	25	09 47 03 04 025			AWG 22/7 stranded	1,5 m			75	09 47 03 04 075			AWG 22/7 "outdoor"	7 m																	
	26	09 47 03 04 026			AWG 22/7 stranded	2 m			76	09 47 03 04 076			AWG 22/7 "outdoor"	8 m																	
	27	09 47 03 04 027			AWG 22/7 stranded	3 m			77	09 47 03 04 077			AWG 22/7 "outdoor"	9 m																	
	28	09 47 03 04 028			AWG 22/7 stranded	4 m			78	09 47 03 04 078			AWG 22/7 "outdoor"	10 m																	
D	29	09 47 03 04 029			AWG 22/7 stranded	5 m			79	09 47 03 04 079			AWG 22/7 "outdoor"	15 m																	
	30	09 47 03 04 030			AWG 22/7 stranded	6 m			80	09 47 03 04 080			AWG 22/7 "outdoor"	20 m																	
	31	09 47 03 04 031			AWG 22/7 stranded	7 m			81	09 47 03 04 081			AWG 22/7 "outdoor"	30 m																	
	32	09 47 03 04 032			AWG 22/7 stranded	8 m			82	09 47 03 04 082			AWG 22/7 "outdoor"	40 m																	
	33	09 47 03 04 033			AWG 22/7 stranded	9 m			83	09 47 03 04 083			AWG 22/7 "outdoor"	50 m																	
	34	09 47 03 04 034			AWG 22/7 stranded	10 m			84	09 47 03 04 084			AWG 22/7 "outdoor"	60 m																	
	35	09 47 03 04 035			AWG 22/7 stranded	15 m			85	09 47 03 04 085			AWG 22/7 "outdoor"	70 m																	
	36	09 47 03 04 036			AWG 22/7 stranded	20 m			86	09 47 03 04 086			AWG 22/7 "outdoor"	80 m																	
	37	09 47 03 04 037			AWG 22/7 stranded	30 m			87	09 47 03 04 087			AWG 22/7 "outdoor"	90 m																	
E	38	09 47 03 04 038			AWG 22/7 stranded	40 m			88	09 47 03 04 088			AWG 22/7 "outdoor"	100 m																	
	39	09 47 03 04 039			AWG 22/7 stranded	50 m																									
	40	09 47 03 04 040			AWG 22/7 stranded	60 m																									
	41	09 47 03 04 041			AWG 22/7 stranded	70 m																									
	42	09 47 03 04 042			AWG 22/7 stranded	80 m																									
	43	09 47 03 04 043			AWG 22/7 stranded	90 m																									
	44	09 47 03 04 044			AWG 22/7 stranded	100 m																									
	45	09 47 03 04 045			AWG 22/7 trailing	0,5 m																									
	46	09 47 03 04 046			AWG 22/7 trailing	1 m																									
	47	09 47 03 04 047			AWG 22/7 trailing	1,5 m																									
F	48	09 47 03 04 048			AWG 22/7 trailing	2 m																									
	49	09 47 03 04 049			AWG 22/7 trailing	3 m																									
	50	09 47 03 04 050			AWG 22/7 trailing	4 m																									

 All Dimensions in mm Original Size DIN A 3	Techn. Character.			Nicht tolerierte Maß/Free size tolerances		
		Dat.	Name	Maßstab/Scale 2:1 (1:1)		
		Detail.	14.10.05 MR			
		Insp.	14.10.05 RA			
DRS490A	07.04.09	MS	Stand.	RJI cord IP20, 90° angled overmoulding 2xRJ45, 90°+270° Position, CAT5		
32762	15.12.05	MS				
32756						
Mod.	Dat.	Name	HARTING Electronics GmbH & Co. KG D-32339 ESPELKAMP			Blatt/ page 2 / 2