


# Cell Type CR17335E-R Specifications

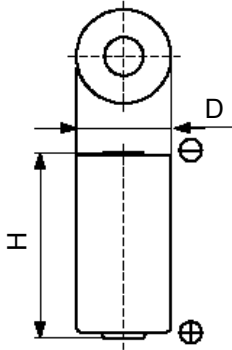

Nominal Voltage (V)		3
Nominal Capacity (mAh) <sup>*1</sup>		1600
Standard Discharge Current (mA)		5
Max. Discharge Current (mA)	Continuous <sup>*2</sup>	500
	Pulse <sup>*3</sup>	2500
Operating Temperature Range (°C)		-40 ~ +85
Max. Dimensions (mm)	Diameter (D)	17.0
	Height (H)	33.5
Weight (g)		17


\*1 Nominal capacity is determined at an end voltage of 2.0V when the battery is allowed to discharge at a standard current level at +23°C.

\*2 Current value is determined to be the level at which 50% of the nominal capacity is obtained with an end voltage of 2.0V at +23°C.


\*3 Current value for obtaining 1.0V cell voltage when pulse is applied for 15 seconds at 50% discharge depth (50% of the nominal capacity) at +23°C.

## Typical Characteristics


### Temperature Characteristics of CR17335E-R

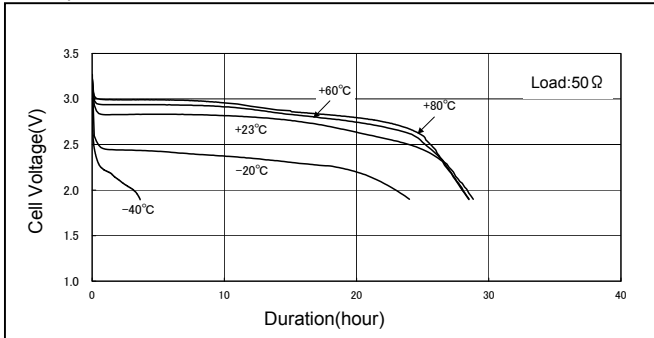

### Temperature Characteristics of CR17335E-R

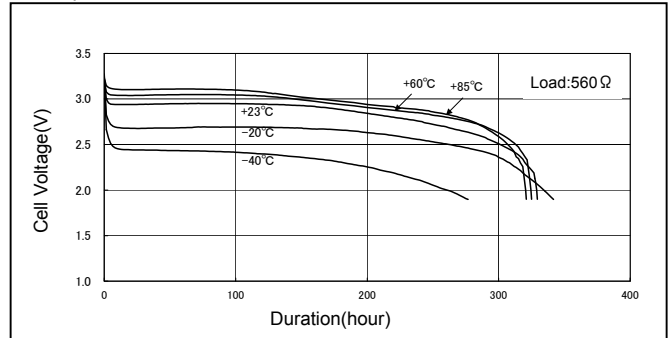

### Discharge Characteristics after storage of CR17335E-R

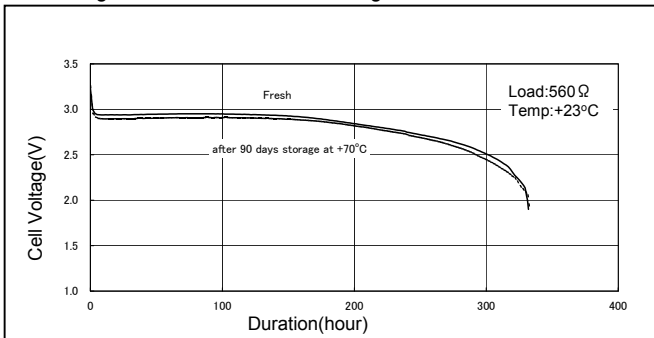

### Discharge Load vs. Cell Capacity of CR17335E-R

