NOTES:

1. MATERIALS AND FINISHES:

BODY - BRASS (ASTM-B16 HO2, C36000), NICKEL PLATING CONTACT PIN - PHOSPHOR BRONZE, GOLD PLATING INSULATOR - PTFE PER ASTM D 1710 OR EQUIV.

2. ELECTRICAL:

50 OHM DC - 4 GHz A. IMPEDANCE: B. FREQUENCY RANGE:


3. MECHANICAL:

A. TEMPERATURE RANGE: -65° C TO -165° C

4. PACKAGING:

A. QUANTITY: SINGLE PACK
B. MARKING: BAG TO BE MARKED
"AMPHENOL, APH—SMAJ—BNCJ, AND DATE CODE

APH-SMAJ-BNCJ **REVISIONS** DRAWING NO. APPR REV DESCRIPTION DATE ECO THIRD ANGLE PROJ. RELEASE TO MFG. 9/12/06 46263 CPM/

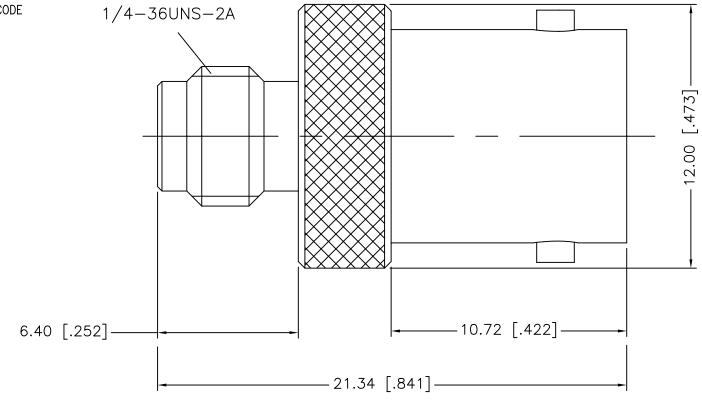

2 PLACE DECIMAL	3 PLACE DECIMAL	ANGLES
±.015 (0,381 mm)	±.005 (0,127 mm)	± 1°
property of Amphenol Corp. confidential and not to be d are given by Amphenol Corp other data by Amphenol Corn not to be regarded by implified the product, process or design,	pecifications, or other data (1) (2) must be returned upon requisclosed to any person other the The furnishing of these drawing, or to any other person to a cation or otherwise in any manner der or any other person to ma patented or otherwise, that may s, specifications, or other data.	

UNLESS OTHERWISE SPECIFIED, DIMENSIONS ARE IN INCHES AND TOLERANCES ARE:

MATERIAL	DRAWN	DATE
	C. McGRATH	4/27/05
	ENGINEER	DATE
	O. BARTHELMES	4/27/05
REFERENCE	APPROVED	DATE
NEI ENERGE	O. BARTHELMES	9/8/06

H:\DEPT611\ASSY\APH\SMAJ-BNCJ

CAD FILE

SMA FEMALE TO BNC FEMALE ADAPTER

Amphenol Corporation RF/Microwave Operations Danbury, Conn. U.S.A. 06810

Α

SCALE: 2:1 SHEET ISSUE

CODE ID DWG SIZE В 74868

APH-SMAJ-BNCJ