



P.C.B. MOUNTING HOLES

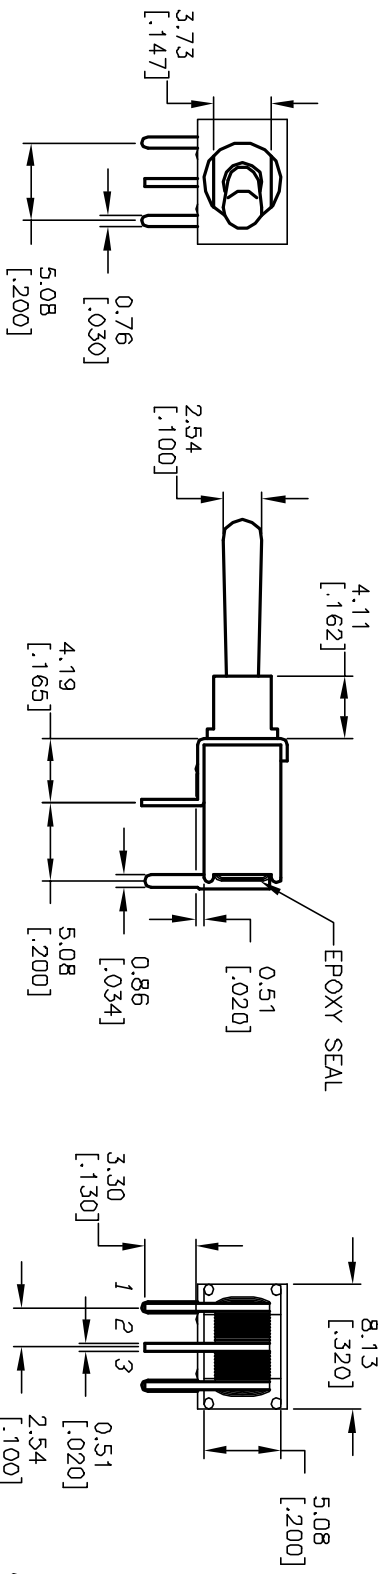

CONTACT CONFIGURATION

SWITCH FUNCTION			
POS. 1	POS. 2	POS. 3	
DN	NONE	DN	
2-3	OPEN	2-1	

- NOTES:
1. ALL DIMENSIONS IN MM [INCH]
  2. GENERAL TOLERANCE: X.X=±0.4  
X.XX=±0.25
  3. TERM. NOS. FOR REF. ONLY
  4. RATING: 0.4(VA) max. @20V max. (AC or DC)
  5. FIXED TERM. & MOVING CONTACT: Copper alloy w/Gold plate over Nickel plate
  6. ELECTRICAL LIFE: 50,000 make-and-break cycles at full load.
  7. INSULATION RESISTANCE: 1000M ohm min.
  8. DIELECTRIC STRENGTH: 1000V RMS min. @sea level.
  9. OPERATING TEMP.: -30°C to 85°C
  10. ▲ DENOTES CRITICAL PARAMETER

**E-SWITCH®**

2004W/MSP11A1M6RE

REV.	ECN No.	DESCRIPTION	DATE	CHKD	SCALE	DATE	DR	DWG	REV
A	12924	RELEASED FOR PRODUCTION	3/19/03	AR	2:1	3/19/03	AR	T201114	A
THE INFORMATION CONTAINED IN THIS DOCUMENT IS PROPRIETARY TO E-SWITCH AND IS NOT TO BE COPIED OR TRANSFERRED									