
## SPECIFICATION CONTROL DRAWING

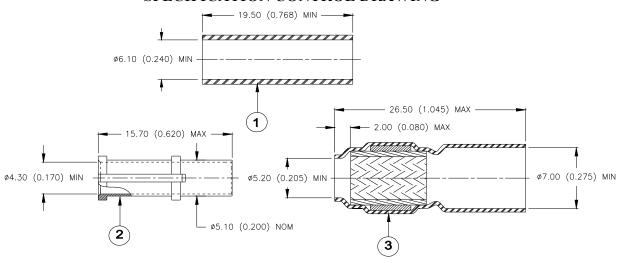


### **MATERIALS**

- 1. INSULATION SLEEVE: Heat-shrinkable, transparent blue, radiation cross-linked modified polyvinylidene fluoride.
- 2. FERRULE: Copper alloy with a suitable plating (see below for plating information).
- 3. SOLDERSHIELD DEVICE:
  - Heat-shrinkable insulation sleeve, transparent blue, radiation cross-linked modified polyvinylidene fluoride.
  - Copper braid pre-tinned with Sn96Ag4 solder alloy with activated rosin flux.
  - Solder Preform: Sn96Ag4 solder alloy, with activated rosin flux.

## **APPLICATION**

- 1. These parts are used on TE Connectivity /Raychem Hexashield adaptors.
- Cable Type: Single or multi-conductors shielded cable: Raychem Spec 44 or Spec 55, single braid. (tin, silver or nickel-plated copper braid)
- 3. Temperature range:  $-65^{\circ}$ C to  $+175^{\circ}$ C.
- 4. For all other application, contact TE Connectivity /Raychem technical service.

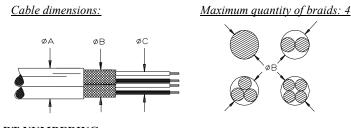

Cable Dimensions									
Q	íΑ	Ø	øС						
Min.	Max.	Min.	Max.	Max.					
3.10	6.90	2.40	5.30	4.20					
(0.122)	(0.270)	(0.095)	(0.210)	(0.165)					

# PART NUMBERING

HET-A-02X

> Ferrule Plating:

- B: Olive drab cadmium in accordance with SAE-AMS-QQ-P-416, over a suitable underplate to withstand 500 hours of salt spray test
- C: Electroless nickel conforming to SAE-AMS-C-26074 Class 3, Grade B.

### **INSTALLATION**

See TE Connectivity / Raychem installation procedure RPIP-696-00.

	TE Connectivity 300 Constitution Drive, Menlo Park, CA. 94025, U.S.A.		.S.A.	Raychem	FERRULE AND SOLDERSHIELD DEVICE FOR HEXASHIELD ADAPTORS				
Unless otherwise specified dimensions are in millimeters. [Inches dimensions are shown in brackets]					DOCUMENT NO.:  HET-A-02X				
TOLERANCES:	ANGI	LES: N/A	TE Connectivity reserves the right to amend						
0.00 N/A 0.0 N/A 0 N/A	ROUG MICR	GHNESS IN ON	this drawing at any time. Users should evaluate the suitability of the product for their application.		REV.:	DATE: 16-Apr-11	APPROVED : MPIOZET		
PREPARED BY:		DCR NUME	BER: REPL		ACES:	CAGE CODE :	SCALE:	SIZE:	SHEET:
mforonda D060000		060000		D050290	06090		A	1 of 1	